



Label dispenser HS/VS

Made in Germany

Label dispenser - Model overview

Two dispensing directions

Two versions are available so as to ensure that the labels can be removed properly for every use.



HS Horizontal dispensing direction



for label rolls with bottom leading print image

Peel off the label upwards from its bottom edge and stick it to the product.



VS Vertical dispensing direction



for label rolls with top leading print image

Peel off the label forward from its upper edge and stick it to the product from the shortest distance possible. Particularly suitable for larger labels as the adhesive side is already directed to the product.

Two operation panels



Basic version

Label feed

- automatically after removal of the label



With operation panel


Label counter from 0 - 9,999

Label feed


- slow / fast
- after pressing the push button or
- automatically after removal of the label or
- by an external signal on the rear side of device

Three widths of material for HS and VS


1.1 HS/VS 60

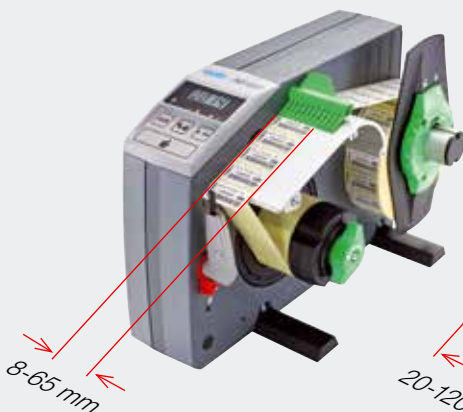

1.2 HS/VS 120

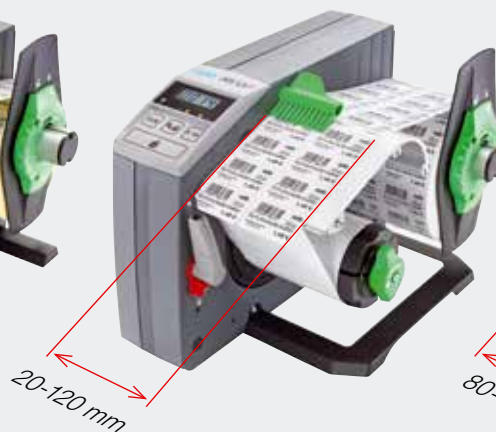

1.3 HS/VS 180

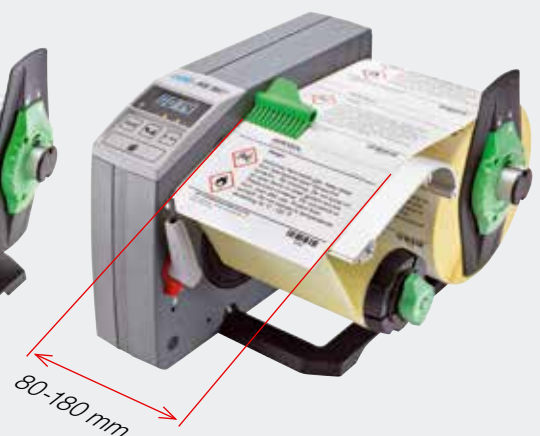


Easy operation and precise label dispensing for a great price

Every label size can be dispensed easily using the HS and VS dispenser.

The labels can be stamped or cut without any space in-between.

You can use any outside shape whether cornered or round.

Transparent material can also be dispensed.

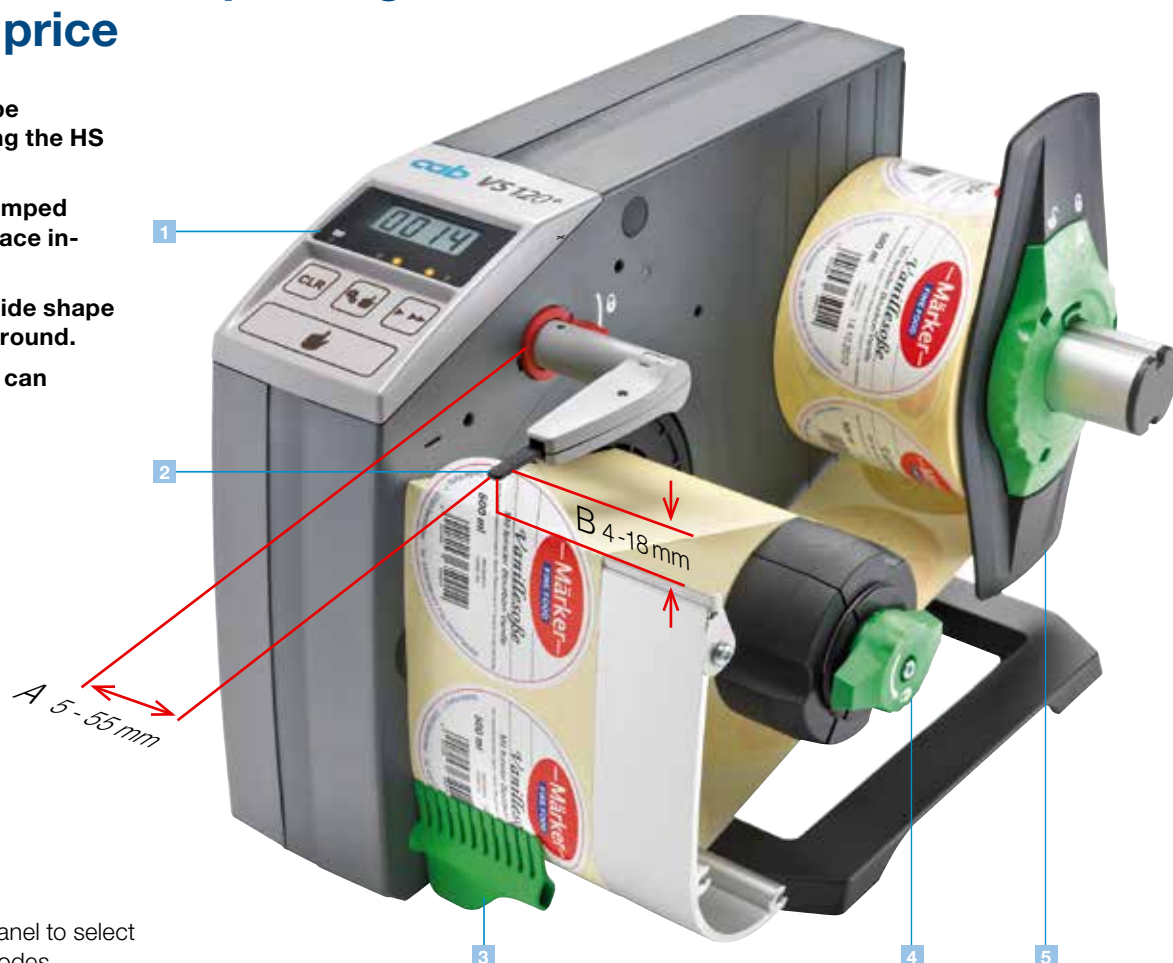

1 Operation panel

Use the operation panel to select various operating modes. This allows setting the feed supply rate to either "slow" or "fast". Labels are fed automatically after removal, by pressing a control key or upon an external signal. A counter indicates how many labels have already been removed.

2 Label sensor

For round labels, the sensor will be set to the label's A apex. You can adjust the pre-dispense height B to between 4 and 18 mm.

3 Label brake

This puts the base material under tension so as to ensure that the labels will be dispensed safely. It can be swivelled away easily when the material is changed.

4 Liner rewinder

Simply insert and clamp the backing tape immediately behind the peel-off edge. It is wound up completely by the strong motor.

5 Roll holder

The label rolls are guided by the stable roll retainer.

Accessories



Battery pack HS/VS 120

To allow mobile labelling at every place where you do not have any socket outlet for power supply. HS and VS allow dispensing more than 5,000 labels using a single battery charge.



Brake for fanfold labels

The brake is used to tightly guide and precisely print fanfold material.

Technical data

Common technical data			HS	VS	with operation panel "+"
Dispensing direction			Horizontal dispensing direction	Vertical dispensing direction	
Label orientation - print image			bottom leading	top leading	
Labels			on rolls, standard or die cut, fan-folded optional		
Materials			paper, textiles, plastics also transparent		
Feed supply rate		up to mm/sec	200		100 / 200
Label roll:	outside diameter	up to mm	200		
	core diameter	mm	38 - 76		
	weight max.	kg	4		
	winding direction		outside or inside		
Rewinder					
Liner	outside diameter up to mm		155		
Label sensor					
Scanning			leading edge of label		
Distance to leading edge mm		A mm	5 - 55		
Pre-dispense		B mm	4 - 18		
Operation panel					
Device indicator	"ON"		green LED	LED and label counter "ON"	
	Error		red LED	Label counter, flashing	
Selector switch	label feed automatic or on demand		—	■	
Control button	with label feed on demand		—	■	
Selector switch	feed supply rate		—	slow / fast	
LCD display	label counter		—	0 - 9999	
Control button	reset label counter		—	■	
Display	dispensing via external signal		—	■	
Connections					
Peripheral connection for peel-off on demand via external signal			—	■	
Inlet connector for non-heating apparatus			Power supply		
Power switch			On / Off		

Operating data			HS/VS	mobile
Power supply			100 - 240 V ~ 50/60 Hz	16,5 - 25 VDC
Power consumption		operation / stand by	max. 30 W / 5 W	
Temperature / humidity:	operation		+5 - 40°C, / 10 - 85% non-condensing	
	storage		+0 - 60°C, / 20 - 80% non-condensing	
	transport		- 25 - 60°C, / 20 - 80% non-condensing	
Noise level			< 60 dB	
Approvals			CE, FCC class A, CB, CCC, UL	

Device specific dimensions			HS/VS60	HS/VS120	HS/VS180+
Width of labels	including liner mm	mm	8 - 65	20 - 120	80 - 180
Height of labels	one-wide	mm	5 - 300	8 - 600	20 - 600
	multi-wide	mm	5 - 110	8 - 110	20 - 110
Device dimensions					
Height x depth without material		mm	250 x 360	250 x 360	250 x 360
Width		mm	180	230	300
Weight		kg	3.3	3.6	4.0

Delivery program

	Art. no.	Device	Type	Label width incl. liner mm	Dispensing direction		Basic version	with operation panel "+"
					horizontal	vertical		
1.1	5542511	Label dispenser	VS 60	8 - 65		■	■	
	5542501	Label dispenser	VS 60+			■		■
	5542510	Label dispenser	HS 60		■		■	
	5542500	Label dispenser	HS 60+		■			■
1.2	5542095	Label dispenser	VS 120	20 - 120		■	■	
	5542195	Label dispenser	VS 120+			■		■
	5542075	Label dispenser	HS 120		■		■	
	5542175	Label dispenser	HS 120+		■			■
1.3	5542503	Label dispenser	VS 180+	80 - 180		■	—	■
	5542502	Label dispenser	HS 180+		■		—	■
2.1	xxxxxxx.600	Label dispenser	xx 120 mobile	20 - 120	■	■	■	■
	5542630	Battery pack	HS/VS 120					
2.2	5542098	Brake for fanfold labels	60	HS/VS 60	■	■	■	■
	5542099	Brake for fanfold labels	120	HS/VS 120	■	■	■	■
	5542069	Brake for fanfold labels	180	HS/VS 180	■	■	■	■

cab delivery program

Label printer EOS1
The compact for
label rolls up to 155 mm Ø



Label printer EOS4
The cost-effective for
label rolls up to 210 mmØ



Label printer EOS mobile
Both EOS sizes with
battery pack for mobile print



Label printer A+ series
The universal



Label printer A+ M
with centered material guide



Label printer XD4
double-sided printing



Textile printer A4+T
for textile material



Label printer XD4T
double-sided printing of textile
material



Label printer XD4
two-color printing



Label printer XD6
two-color printing



Label dispenser HS
Precise and easy dispensing in
horizontal direction
up to a width of 180 mm



Label dispenser VS
Precise and easy dispensing in
vertical direction up to a width of
180 mm



Labeling system Hermes+
for automation



Print module PX series
for integration into automatic
labeling systems



Labels / Transfer ribbons
Precise printing with cab's
labels and transfer ribbons



Label software cablabel® S3
standard and optional software



Laser marking system FL series
Precise and fast




Laser safety housing
The industrial solution



- Headquarters in Germany
- cab offices
820 partners
in over 80 countries

cab maintains a presence in the world's major economic areas.

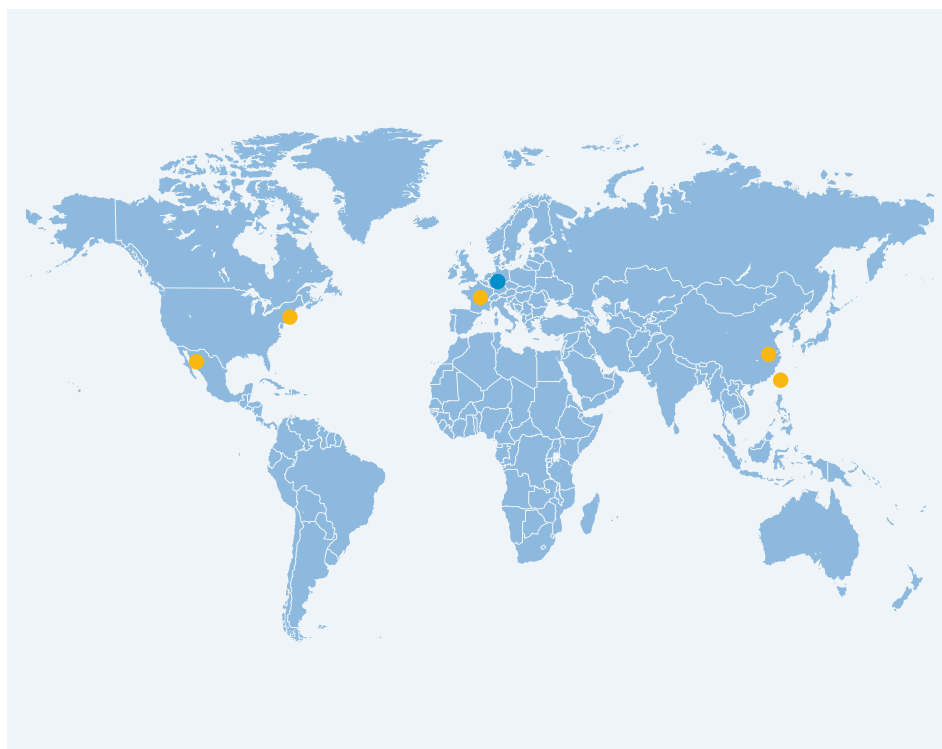

For current data, please refer to www.cab.de

Germany

cab Produkttechnik
GmbH & Co KG
Postfach 1904
76007 Karlsruhe
Wilhelm-Schickard-Str. 14
76131 Karlsruhe
Telefon +49 721 6626-0
Telefax +49 721 6626-249
www.cab.de
info@cab.de

**Further partners
on request.**

France

cab technologies s.a.r.l.
67350 Niedermodern
Téléphone +33 388 722 501
www.cab.de/fr
info.fr@cab.de

USA

cab Technology Inc.
Tyngsboro MA, 01879
Phone +1 978 649 0293
www.cab.de/us
info.us@cab.de

Asia 亚洲

cab Technology Co, Ltd.
希愛比科技股份有限公司
Junghe, Taipei, Taiwan
Phone +886 2 8227 3966
www.cab.de/tw
info.asia@cab.de

China 中国

cab (Shanghai) Trading Co., Ltd
铠博(上海)贸易有限公司
Phone +86 21 6236-3161
www.cab.de/cn
info.cn@cab.de

This documentation and any translations hereof are the property of cab GmbH & Co KG.

The replication, processing, reproduction or distribution in whole or in parts requires our prior written consent. © Copyright by cab/9009654.

All delivery, design and technical specifications are compiled to the best of our current knowledge and are subject to change without prior notice.