



Advanced Manufacturing Services Ltd

80 Biddulph Road

Congleton

Cheshire

CW12 3LG

Email: sales@ams-electronics.co.uk

Tel: +44 (0) 1260 270 950

■ Destacker/Push-Up Stacker



Features

- User friendly soft touch LED membrane control panel
- Smooth and parallel width adjustment by leadscrew
- Small machine footprint
- Conveyor height 950±30mm
- SMEMA compatible




Close-up views

Technical Parameters

Description	These units are for loading or restacking bare board PCB's in/off the line
Belt Type	Antistatic Flat Belt of 3mm width
Max. PCB Capacity	400 pcs (0.6mm thickness)
Power Source	AC 220V, 50/60Hz, 1 phase
Power Consumption	300W Max.
Air Pressure & Consume	4-6 bar, 30 l/min Max.

Schematic

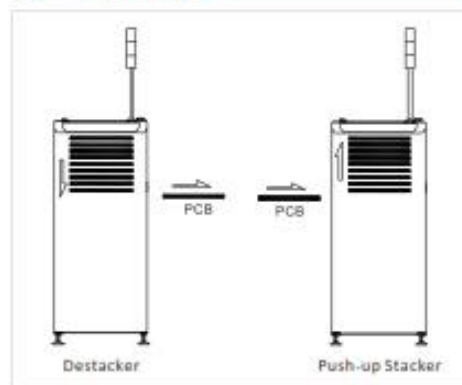

Specifications

Units in mm

Machine Type	Size	Model	Machine Dimensions (LxWxH)	Effective PCB Size	Weight (Kg)
Destacker	M	LS-280SD3BM	503x669x1200	50x65 - 330x250	180
	XL	LS-280SD3BXL	503x889x1200	50x65 - 470x460	249
Push-up Stacker	M	LS-281SD3BM	503x669x1200	50x65 - 330x250	180
	XL	LS-281SD3BXL	503x889x1200	50x65 - 470x460	249