



Advanced Manufacturing Services Ltd

80 Biddulph Road

Congleton

Cheshire

CW12 3LG

Email: sales@ams-electronics.co.uk



Tel: +44 (0) 1260 270 950

Flash-Off Conveyor



Features


- Modular design, PLC + Touch Screen control
- Stability enhanced by heavy design
- Beautiful design with aluminum finishings
- Smooth and parallel width adjustment (stainless steel screws)
- Covers which protect the boards against dust
- 2-segments with independent flash-off time (programmable)
- Automatic/Manual modes with inspection button
- Independent variable speed controls for each rail
- UV lights to analyze the coating result over the boards
- SMTA compatible
- Conveyor height 950±30mm
- Extractable tray for easy clean-up of coating droplets
- Automatic width adjustment by touch screen
- Exhaust sensor which forces to use air extraction



Technical Parameters

Description	This unit is used as a visual inspection station for operators controlling the boards right after a conformal coating line.
Belt Type	Antistatic Flat Belt of 12mm width
Conveyor Speed	0.5-20m/min or specify
Power Source	AC 220V, 50/60Hz, 1 phase
Power Consumption	100W Max.

Schematic

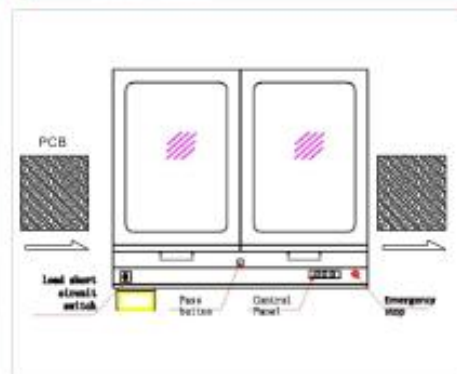

Specifications

Units in mm

Size	Model	Machine Dimensions (LxWxH)	Effective PCB Size	Weight (Kg)
XL	LS-C100HD12TXL-ACOUVT	1000x871x950	50x50 - 470x460	150