



Advanced Manufacturing Services Ltd

80 Biddulph Road

Congleton

Cheshire

CW12 3LG

Email: sales@ams-electronics.co.uk

Tel: +44 (0) 1260 270 950


■ Lowering Gate Conveyor



Features

- Lowering & lifting of the gate conveyor is done by push buttons
- Safety sensor installed to enhance safety
- 650mm passage way, or specify
- Variable speed control
- Conveyor height 950±30mm
- SMEMA compatible

Technical Parameters	
Description	This unit is used to allow passage across the line when required.
Belt Type	Antistatic Flat Belt of 3mm width
Conveyor Speed	0.5-20m/min or specify
Cycle Time	Approx. 6 seconds
Power Source	AC 220V, 50/60Hz, 1 phase
Power Consumption	100W Max.
Air Pressure & Consume	4-6 bar, 48 l/min Max.

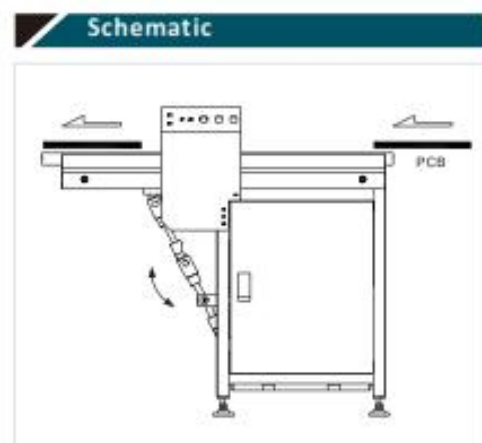

Specifications		Units in mm		
Size	Model	Machine Dimensions (LxWxH)	Effective PCB Size	Weight (Kg)
XL	LS-022SD38XL	1200x619x1062	50x50 - 530x460	200