



Advanced Manufacturing Services Ltd

80 Biddulph Road

Congleton

Cheshire

CW12 3LG

Email: sales@ams-electronics.co.uk

Tel: +44 (0) 1260 270 950

■ Multi-Function Vertical Buffer



Features

- User friendly touch screen control panel
- FIFO, LIFO and pass-through operating modes selectable
- Fast, smooth and precise indexing (Freq. inverter controller)
- Selectable system threshold
- Smooth and parallel width adjustment (lead screw)
- Conveyor height 950±30mm
- SMEA compatible



Internal belts




Touch screen interface

Technical Parameters

Description	This unit is used as a buffer between SMT machines
Cycle Time	Approx. 10 seconds
Max. PCB Capacity	20 pcs maximum
Internal belts Type	Antistatic Flat Belt of 3mm width
Indexing Pitch	10, 20mm or specify
Power Source	AC 220V, 50/60Hz, 1 phase
Power Consumption	900W Max.
Air Pressure & Consume	4-6 bar, 15 l/min Max.

Schematic

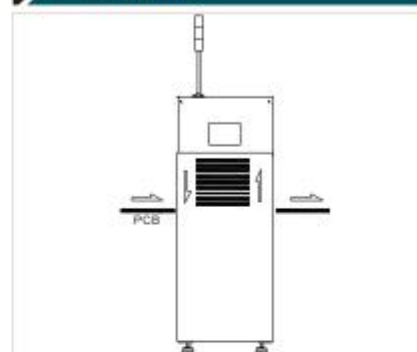

Specifications

Units in mm

Size	Model	Machine Dimensions (LxWxH)	Effective PCB Size	Weight (Kg)
M	LS-1025D3BM	600x984x1600	50x50 - 330x250	380