



Advanced Manufacturing Services Ltd

80 Biddulph Road

Congleton

Cheshire

CW12 3LG

Email: sales@ams-electronics.co.uk

Tel: +44 (0) 1260 270 950

■ Telescopic Gateconveyor




Features

- User friendly soft touch LED membrane control panel
- Swift and smooth retraction/extension of the conveyor
- Safety sensor installed to enhance safety
- 850mm passage way, or specify
- Conveyor height 950±30mm
- SMTA compatible

Technical Parameters

Description	This unit is used to allow passage across the line when required.
Belt Type	Antistatic Flat Belt of 3mm width
Conveyor Speed	0.5-20m/min or specify
Power Source	AC 220V, 50/60Hz, 1 phase
Power Consumption	300W Max.
Air Pressure & Consume	4-6 bar, 16 l/min Max.

Schematic

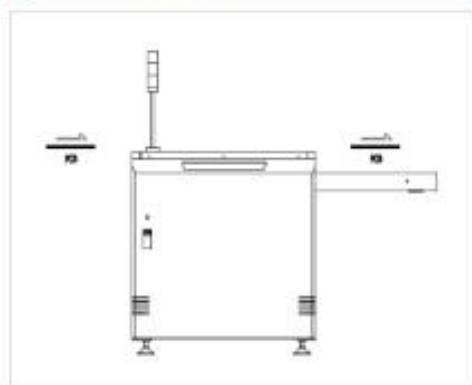

Specifications

Units in mm

Size	Model	Machine Dimensions (LxWxH)	Effective PCB Size	Weight (Kg)
L	LS-0235D3BL	1500x915x1081	50x50 - 445x330	250