



Advanced Manufacturing Services Ltd

80 Biddulph Road

Congleton

Cheshire

CW12 3LG

Email: sales@ams-electronics.co.uk

Tel: +44 (0) 1260 270 950

Turn Conveyor

Features

- User friendly soft touch LED membrane control panel
- Enclosed design with built-in torque limiter to ensure a high level of safety
- Smooth and precise rotation
- Conveyor height 950±30mm
- SMEMA compatible




Upper View



Technical Parameters

Description	This unit is used to redirect the PCB flow in a production line (90°, 180°, 270°).
Belt Type	Antistatic Flat Belt of 3mm width
Cycle Time	Approx. 12 seconds
Power Source	AC 220V, 50/60Hz, 1 phase
Power Consumption	300W Max.

Schematic

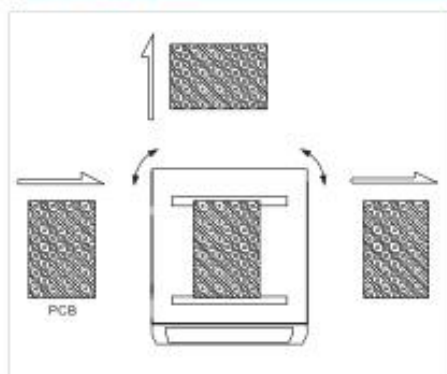

Specifications

Units in mm

Size	Model	Machine Dimensions (LxWxH)	Effective PCB Size	Weight (Kg)
M	LS-210SD3BM	700x695x1200	50x50 - 330x250	350
L	LS-210SD3BL	723x789x1200	50x50 - 445x330	380
XL	LS-210SD3BXL	803x860x1200	50x50 - 530x460	410