

ALPHA® HIFLO® SMG

WAVE SOLDER METAL

DESCRIPTION

ALPHA HiFlo SMG is manufactured using ultra high purity raw materials and the alloy is conditioned using Alpha's proprietary viscosity and dross lowering treatments. This results in a pure, low drossing, high fluidity solder alloy, which is free of cast-in impurities and included oxides. Characteristics include very low dross, reduced skips, bridges and icicling and fine pitch soldering. Ideal for densely populated boards, it enables increased production speeds and yield improvements, reduces solder pot maintenance.

FEATURES & BENEFITS

- *Increases Production Speed:* which means lower product cost.
- *Minimises Drossing:* lowers downtime for maintenance and reduced solder consumption and cost.
- *Reduces Bridging:* lower amount of rework to higher yield, lowers cost and reduces chances of defects getting to consumer.
- *Solders Densely Populated Boards:* can be used on all your applications, you only need to stock one grade.
- *Solders at a Lower Temperature:* lower temperatures mean less oxide production and hence lower solder usage and cost.

APPLICATION

ALPHA HiFlo SMG is the ideal companion product for all wave soldering systems including inert atmosphere equipment. HiFlo SMG is ideal for the following types of applications:

- High volume wave soldering processes.
- Applications requiring dual wave and chip wave systems.
- Boards that are densely populated.
- Fine pitch soldering.

A solder pot temperature of 240-250° is recommended. For suitable wave solder fluxes, please see our selector guide. Reclaim services including dedicated containers are also available. Please consult your local sales office.

AVAILABILITY

ALPHA HiFlo SMG is available in 3.5 kg feeder bars, 1 kg bars, and solder chunks for first fill of solder baths.

ALPHA[®] HIFLO[®] SMG


WAVE SOLDER METAL

SAFETY

Consult the SDS for all safety information. The most recent version of the SDS is available from AlphaAssembly.com.

DIMENSIONS OF BARS

All dimensions in mm.

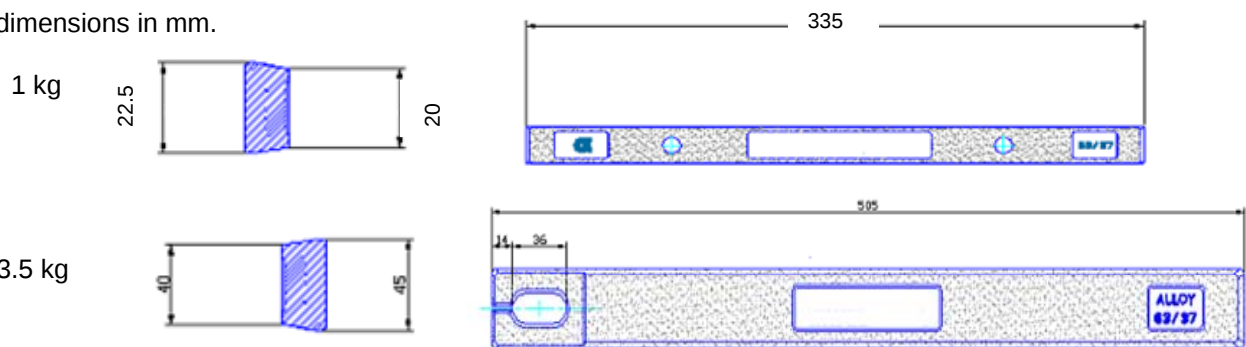

TECHNICAL SPECIFICATION

The following indicates the alloy and impurity limits for Hiflo SMG in relation to J-STD-006C, ISO9453, and JIS Z3282.

ELEMENT	Hiflo SMG	ISO9453 Sn63Pb37E	J-STD-006C	JIS Z3282 H63E
Sn	62.5 - 63.5	62.5 - 63.5	62.5 - 63.5	62.5 - 63.5
Pb	Balance	Balance	Balance	Balance
Sb	0.05 max	0.05 max	0.20 max	0.05 max
Cu	0.007 max	0.08 max	0.08 max	0.08 max
Zn	0.001 max	0.001 max	0.003 max	0.001 max
Fe	0.005 max	0.02 max	0.02 max	0.02 max
As	0.008 max	0.03 max	0.03 max	0.03 max
Ni	0.002 max	0.01 max	0.01 max	0.01 max
Bi	0.01 max	0.05 max	0.10 max	0.05 max
Cd	0.001 max	0.002 max	0.002 max	0.002 max
Ag	0.005 max	0.10 max	0.10 max	0.10 max
Al	0.001 max	0.001 max	0.005 max	0.001 max
In	0.02 max	0.10 max	0.10 max	0.10 max
Au	0.01 max	0.05 max	0.05 max	0.05 max

All figures are %

ALPHA® HIFLO® SMG

WAVE SOLDER METAL

1. ISO 9453: 2006
Soft Soldering Alloys – chemical composition and form. ISO – International Standards Organization, a network of national standards institutes working in partnership.
2. J-STD-006C: July 2013
Requirements for Electronic Grade Solder alloys and non-fluxed solders. Joint Industry Standards between IPC and Electronic Industries Alliance (US Based). IPC formed in 1957 as an Institute of Printed Circuits, J-STD-006C supersedes J-STD-006B.
3. JIS Z3282: 2006
Soft solders chemical composition and forms. JIS – Japanese Industrial Standards.

CONTACT INFORMATION

To confirm this is the most recent issue, please contact Alpha Assembly Solutions
AlphaAssembly.com

North America 300 Atrium Drive Somerset, NJ 08873, USA 800.367.5460	Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 01483.758400	Asia 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100
---	--	--

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency directory assistance Chemtrec 1 - 800 - 424 - 9300.

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OR MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any product defective at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect and consequential damages that may result from use of the products under conditions, and agrees to exonerate, indemnify and hold harmless MacDermid Incorporated therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in infringement of any patent rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

® Registered Trademark of MacDermid Performance Solutions. ™ Trademark of MacDermid Performance Solutions.
 © Platform Specialty Products Corporation and its subsidiaries 2016.