

ALPHA® CLEANWAVE

WAVE SOLDER METAL

DESCRIPTION

CLEANWAVE is manufactured using high purity raw materials and is treated using proprietary dross reducing technology to give a solder alloy that has Low Dross Characteristics.

As a general purpose wave soldering product, it has very good wetting and soldering performance, meets international specifications J-STD-006A, ISO 9453, JIS Z3282A, and includes proprietary dross reducing technology.

FEATURES & BENEFITS

- *Low Dross Characteristics:* giving cost effective use of the solder alloy.
- *Low Dross Characteristics:* reducing the amount of dross in the wave pot leading to lower downturn and reducing the chance of oxide entrapped in joints.
- *Manufactured to Alpha's high standards:* giving a product that can be relied on to give good consistent soldering performance.

APPLICATION

CLEANWAVE can be used in all wave soldering systems and will give excellent soldering performance and good value per joint. A solder pot temperature of 240-250° is recommended. For suitable wave solder fluxes, please see our selector guide. Reclaim services including dedicated containers are also available. Please consult your local sales office.

AVAILABILITY

CLEANWAVE is available in 3.5 kg feeder bars, 1 kg bars, and solder chunks for first fill of solder baths.

SAFETY


Consult the SDS for all safety information. The most recent version of the SDS is available from AlphaAssembly.com.

ALPHA® CLEANWAVE

WAVE SOLDER METAL

DIMENSIONS OF BARS

All dimensions in mm.

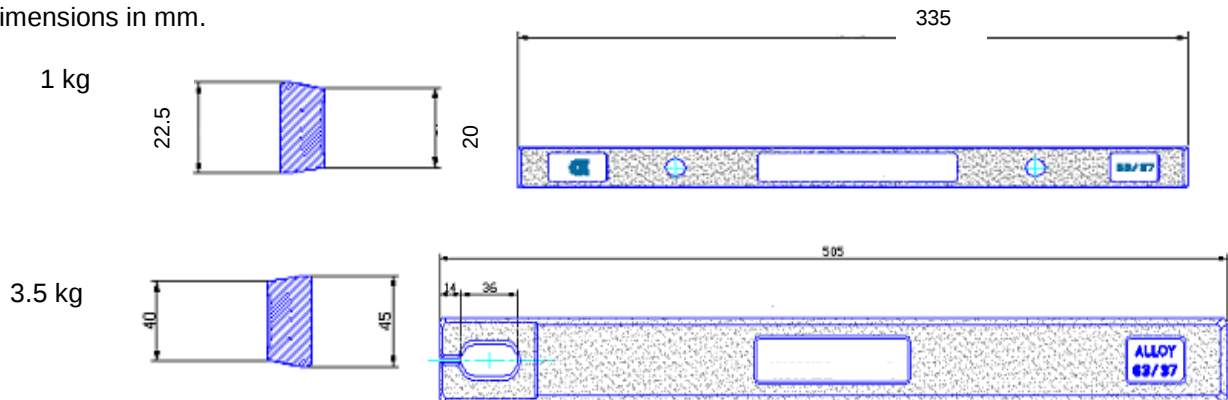

TECHNICAL SPECIFICATIONS

The following indicates the alloy and impurity limits for CLEANWAVE in relation to J-STD-006A, ISO9453, and JIS Z3282.

ELEMENT	CLEANWAVE	ISO9453 Alloy 1 ¹	J-STD-006A Sn63Pb37B ²	JIS Z3282A H63A ³
Sn	62.5 - 63.5	62.5 - 63.5	62.5 - 63.5	62.5 - 63.5
Pb	Balance	Balance	Balance	Balance
Sb	0.12 max	0.12 max	0.20 max	0.12 max
Cu	0.05 max	0.05 max	0.08 max	0.05 max
Zn	0.001 max	0.001 max	0.003 max	0.002 max
Fe	0.01 max	0.02 max	0.02 max	0.02 max
As	0.01 max	0.03 max	0.03 max	0.03 max
Ni	0.01 max	Not specified	0.01 max	Not specified
Bi	0.10 max	0.10 max	0.10 max	0.10 max
Cd	0.001 max	0.002 max	0.002 max	0.002 max
Ag	0.10 max	Not specified	0.10 max	Not specified
Al	0.001 max	0.001 max	0.005 max	0.002 max
In	0.05 max	Not specified	0.10 max	Not specified

All figures are %

1. ISO 9453: 1990

Soft Soldering Alloys - chemical composition and form. ISO - International Standards Organization, a network of national standards institutes working in partnership.

ALPHA® CLEANWAVE

WAVE SOLDER METAL

2. J-STD-006A: May 2001
Requirements for Electronic Grade Solder alloys and non-fluxed solders. Joint Industry Standards between IPC and Electronic Industries Alliance (US Based). IPC formed in 1957 as an Institute of Printed Circuits, J-STD-006A supersedes IPC-SF-818.
3. JIS Z3282: 1999
Soft solders chemical composition and forms. JIS – Japanese Industrial Standards.

CONTACT INFORMATION

To confirm this is the most recent issue, please contact Alpha Assembly Solutions
AlphaAssembly.com

North America 300 Atrium Drive Somerset, NJ 08873, USA 800.367.5460	Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 01483.758400	Asia 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100
---	--	--

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency directory assistance Chemtrec 1 - 800 - 424 - 9300.

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OR MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any product defective at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect and consequential damages that may result from use of the products under conditions, and agrees to exonerate, indemnify and hold harmless MacDermid Incorporated therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in infringement of any patent rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

® Registered Trademark of MacDermid Performance Solutions. ™ Trademark of MacDermid Performance Solutions.
© Platform Specialty Products Corporation and its subsidiaries 2016.