

ALPHA® OM-338 Series

LEAD-FREE SOLDER PASTE

DESCRIPTION

ALPHA OM-338 is a lead-free, no-clean solder paste designed for a broad range of applications. **ALPHA OM-338's** broad processing window is designed to minimize transition concerns from tin/lead to lead free solder paste. This material is engineered to deliver the comparable performance to a tin lead process.* **ALPHA OM-338** yields excellent print capability performance across various board designs and, particularly, with ultra fine feature repeatability (11 mil Squares) and high throughput applications.

Outstanding reflow process window delivers good soldering on CuOSP with excellent coalescence on a broad range of deposit sizes, exceptional random solder ball resistance and mid-chip solder ball performance. **ALPHA OM-338** is formulated to deliver excellent visual joint cosmetics. Additionally, **ALPHA OM-338's** capability of IPC Class III for voiding and ROL0 IPC classifications ensures maximum long-term product reliability.

**Although the appearance of these lead-free alloys will be different to that of tin-lead, the mechanical reliability is equal to or greater than with that of tin-lead or tin-lead-silver.*

FEATURES & BENEFITS

- Maximizes reflow yield for lead-free processing, allowing full alloy coalescence at circular dimensions as small as 0.25mm (0.010") with 0.100mm (4mil) stencil thickness.
- Excellent print consistency with high process capability index across all board designs.
- Print speeds of up to 200mm/sec (8"/sec), enabling a fast print cycle time and a high throughput.
- Wide reflow profile window with good solderability on various board / component finishes.
- Excellent solder and flux cosmetics after reflow soldering
- Reduction in random solderballing levels, minimizing rework and increasing first time yield
- Meets highest IPC 7095 voiding performance classification of Class III.
- Excellent reliability properties, halide-free material
- Compatible with either nitrogen or air reflow

ALPHA® OM-338 Series

LEAD-FREE SOLDER PASTE

PRODUCT INFORMATION

<u>Alloys:</u>	SAC305, SAC387, SAC396, SAC405 & SACX™ , For other alloys, contact your Alpha Sales Office.
<u>Powder Size:</u>	Type 3 and Type 4
<u>Packaging Sizes:</u>	500 gram jars, 6" & 12" cartridges, DEK ProFlow™ cassettes, and 10cc and 30cc dispense syringes.
<u>Flux Gel:</u>	OM-338 Flux Gel is available in 10cc and 30cc syringes for rework applications.
<u>Lead Free:</u>	Complies with RoHS Directive 2002/95/EC.

APPLICATION

Formulated for both standard and fine pitch stencil printing, at print speeds of between 25mm/sec (1"/sec) and 200mm/sec (8"/sec), with stencil thickness of 0.100mm (0.004") to 0.150mm (0.006"), particularly when used in conjunction with ALPHA® Stencils. Blade pressures should be 0.16-0.34 kg/cm of blade (0.9 -2lbs/inch), depending upon the print speed. The higher the print speed employed, the higher the blade pressure that is required. The reflow process window will give high soldering yield with good cosmetics and minimized rework.

SAFETY

While the **ALPHA OM-338** flux system is not considered toxic, its use in typical reflow will generate a small amount of reaction and decomposition vapors. These vapors should be adequately exhausted from the work area. Consult the MSDS for additional safety information.

ALPHA® OM-338 Series

LEAD-FREE SOLDER PASTE

TECHNICAL DATA

CATEGORY	RESULTS	PROCEDURES/REMARKS
CHEMICAL PROPERTIES		
Activity Level	ROL-0 = J-STD Classification	IPC J-STD-004
Halide Content	Halide free. Passes Ag Chromate Test	IPC J-STD-004
Copper Mirror Test	Pass	IPC J-STD-004
Copper Corrosion Test	Pass, (No evidence of Corrosion)	IPC J-STD-004
Bono Corrosion Test	Pass (7.45%)	15 days @ 85% RH, 20V
ELECTRICAL PROPERTIES		
SIR (IPC 7 days @ 85° C/85% RH)	Pass , 1.9×10^{10} ohms	IPC J-STD-004A (Pass $\geq 1 \times 10^8$ ohm)
SIR (Bellcore 96 hours @ 35°C/85%RH)	Pass , 8.3×10^{12} ohms	Bellcore GR78-CORE (Pass $\geq 1 \times 10^{11}$ ohm)
Electromigration (Bellcore 96 hours @ 65°C/85%RH 10V 500 hours)	Pass , Initial = 5.3×10^{10} ohms Final = 1.5×10^{11} ohms	Bellcore GR78-CORE (Pass=final > initial/10)
PHYSICAL PROPERTIES (Using 88.5% Metal, Type #3 Powder)		
Color	Clear, Colorless Flux Residue	
Tack Force vs. Humidity	Pass , Change of <1 g/mm ² over 24 hours at 25%, 50% and 75 % Relative Humidity	IPC J-STD-005
Tack Force vs. Time	Pass , Change of $<10\%$ when stored at $25 \pm 2^\circ\text{C}$ and $50 \pm 10\%$ relative humidity	JIS Z-3284, Annex 9
Viscosity	83.3% metal load for T3 designated M04 for dispensing. 88.5% metal load for T3 designated M15 and 88.5% metal load for T4 designated M16 for printing.	Malcom Spiral Viscometer; 1. J-STD-005
Solderball	Acceptable (SAC 305 and SAC405 alloys)	IPC J-STD-005
Stencil Life	> 8 hours	@ 50%RH, 23°C (74°F)
Spread	Pass	JIS-Z-3197: 1999 8.3.1.1
Slump	Pass	IPC J-STD-005 (10 min 150°C)
	Pass	JIS-Z-3284-1994 Annex 8

ALPHA® OM-338 Series

LEAD-FREE SOLDER PASTE

PROCESSING GUIDELINES

STORAGE-HANDLING	PRINTING	REFLOW*	CLEANING
- Refrigerate to guarantee stability @ (0-10)°C, (32-50)°F - Shelf life of refrigerated paste is six months from the manufacturing date. - Paste can be stored for 2 weeks at room temperatures up to 25°C (77°F) prior to use. - When refrigerated, warm-up of paste container to room temperature for a minimum of 4 hours. Paste must be ≥19°C (66°F) before processing. Verify paste temperature with a thermometer to ensure paste is at 19°C (66°F) or greater before setup. Printing can be performed at temperatures up to 29°C (84°F). - Do not remove worked paste from stencil and mix with unused paste in jar. This will alter rheology of unused paste. - These are starting recommendations and all process settings should be reviewed independently.	STENCIL: Recommend ALPHA CUT or ALPHA FORM stencils @ 0.100mm - 0.150 mm (4-6 mil) thick for 0.4 - 0.5 mm (0.016" or 0.020") pitch. Stencil design is subject to many process variables. Contact your local ALPHA Stencil site for advice. SQUEEGEE: Metal (recommended) PASTE ROLL: 1.5-2.0 cm diameter and make additions when roll reaches 1-cm (0.4") diameter (min). Max roll size will depend upon blade. "Exceeding the maximum diameter may cause curtaining (sticking to the squeegee when it is lifted from the stencil)." PRESSURE: 0.16-0.34 kg/cm of squeegee length (0.9-2.0 lbs./inch). SPEED: 25 to 200mm per second (1 to 8 inches per second). SEPARATION SPEED: Disable slow snap off for fast PCB release	ATMOSPHERE: Clean-dry air or nitrogen atmosphere. PROFILE (SAC Alloys): A straight ramp profile @ 0.8°C to 1.7°C per second ramp rate is recommended (TAL 35-90 sec and peak 232-250°C).⁽¹⁾ Higher density assemblies may require preheating within the profile and may be accomplished as follows: - From 40°C to Liquidus: Between 2min 30 sec. and 4 min. (optimum⁽²⁾ is 3 min.) - From 170°C to Liquidus: Between 45 sec. and 75 sec. (optimum⁽²⁾ is 1 min.) - From 130°C to Liquidus: Between 1min. 20 sec. and 2 min. 15 sec. (optimum⁽²⁾ is 1min. 30 sec.) - Time above liquidus: Between 30 sec. and 90 sec. (optimum⁽²⁾ is 45 sec. to 70 sec.) Note 1: Refer to component and board supplier data for thermal properties at elevated temperatures. Lower peak temperatures require longer TAL for improved joint cosmetics. Note 2: OM-338 is designed to work under a wide range of reflow profiles in order to find the optimum profile for your process. This can be achieved by balancing: (1) Minimum Delta T's (depending on board mass and thermal oven characteristics) (2) Maximum Reflow Yield (includes voiding, cosmetics, solder balling, etc.) (3) Minimum Stress and Overheat for Components and Boards (refer to suppliers' guidelines and specifications).	ALPHA OM-338 residue is designed to remain on the board after reflow. If reflowed residue cleaning is required, ALPHA BC-2200 aqueous cleaner is recommended. For solvent cleaning, agitation for 5 min in the following cleaners is recommended: - ALPHA SM-110E - Kyzen Micronox MX2501 - ATRON® AC 205 (ZESTRON) Misprints and stencil cleaning may be done with ALPHA SM-110E, ALPHA SM-440, ALPHA BC-2200 and ZESTRON® SD 301 cleaners.

ALPHA® OM-338 Series LEAD-FREE SOLDER PASTE

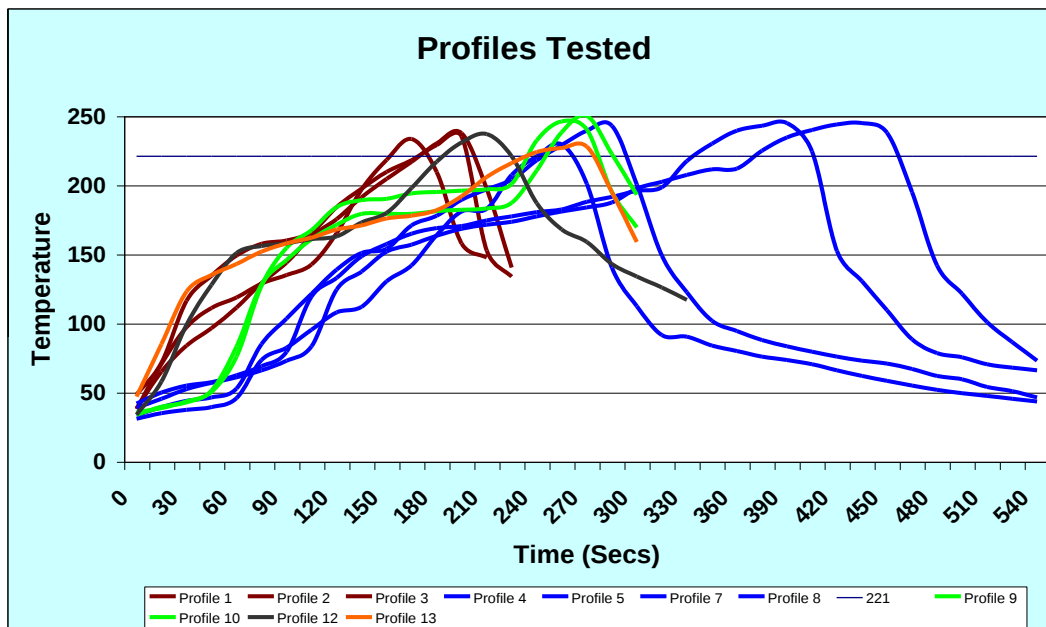


figure #1 – Reflow Envelope

CONTACT INFORMATION

To confirm this is the most recent issue, please contact Alpha Assembly Solutions

www.AlphaAssembly.com

North America 300 Atrium Drive Somerset, NJ 08873, USA 800.367.5460	Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 01483.758400	Asia 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100
---	--	--

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency directory assistance Chemtrec 1 - 800 - 424 - 9300.

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OR MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any product defective at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect and consequential damages that may result from use of the products under conditions, and agrees to exonerate, indemnify and hold harmless MacDermid Incorporated therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in infringement of any patent rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

® Registered Trademark of MacDermid Performance Solutions. ™ Trademark of MacDermid Performance Solutions.
 © Platform Specialty Products Corporation and its subsidiaries 2016.